


TENNIS SCOREBOARD

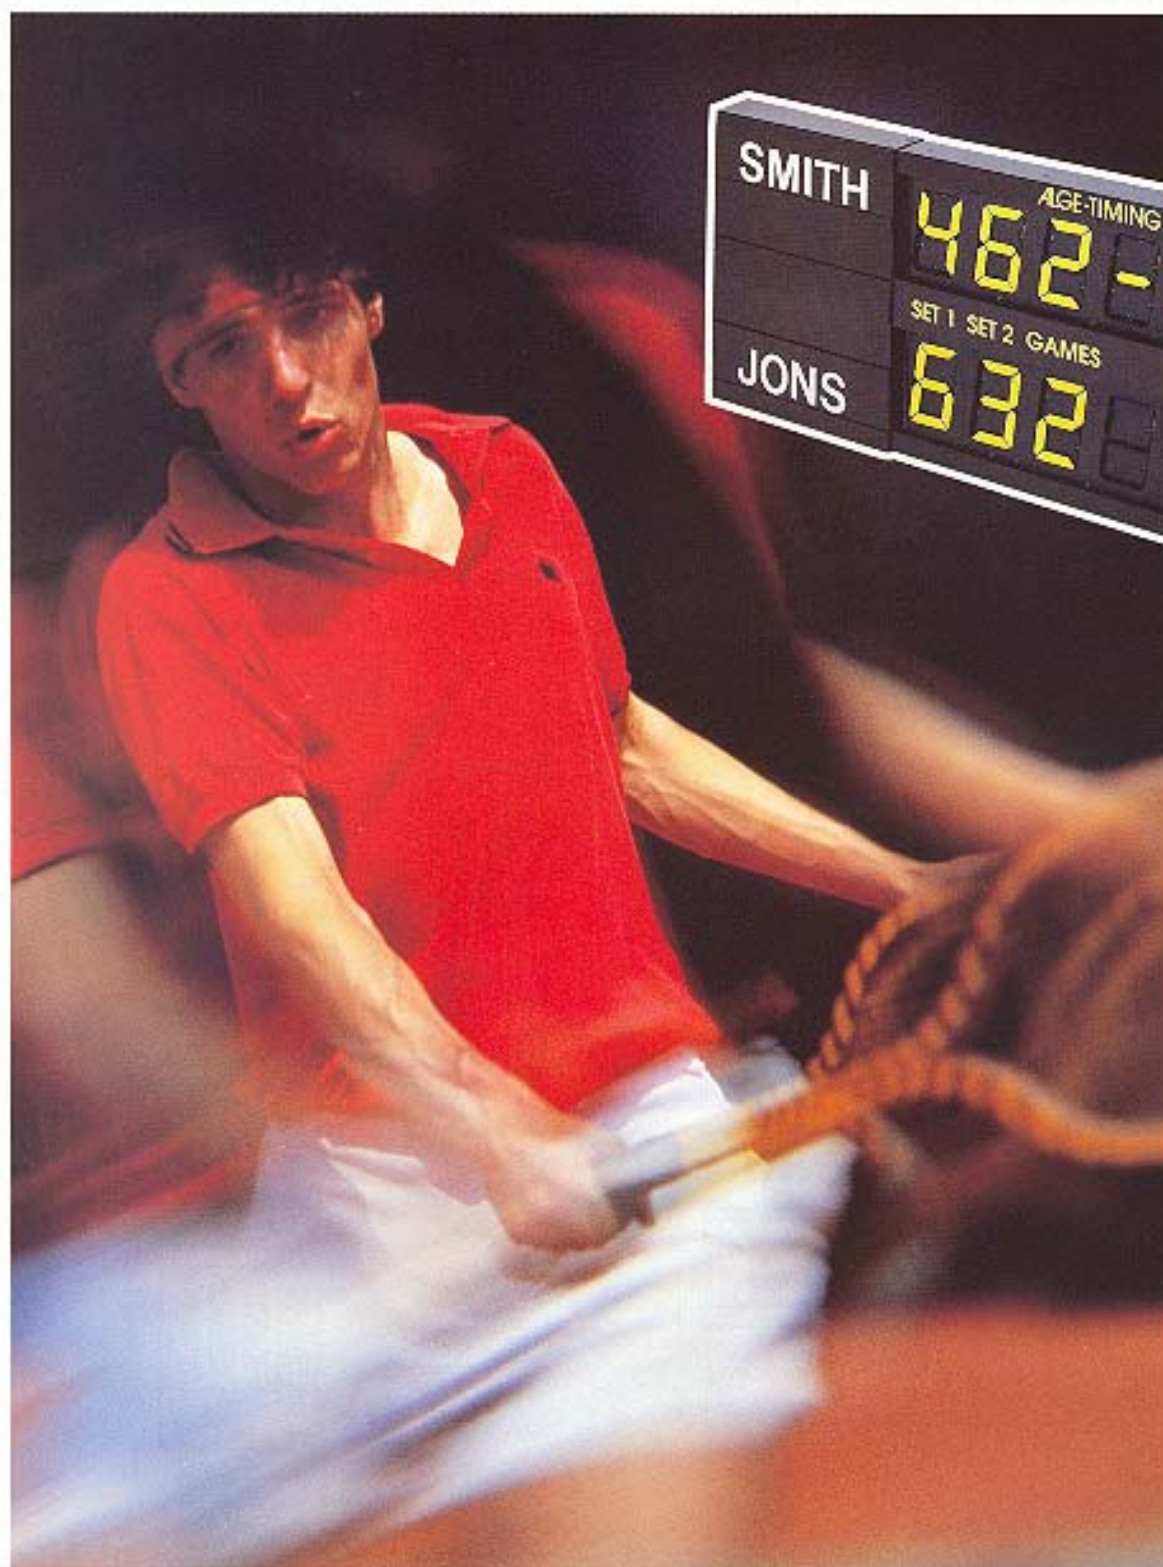

ALGE
TIMING

ALGE Tennis Scoreboard

The TENNIS SCOREBOARD consists of two ALGE GAZC display boards mounted in a special case with slots for inserting the names of the players. The scoreboard is controlled from the COMET terminal, and can be operated from any distance using two conductor telephone wires. This rugged unit can be fastened to a base. The scoreboard features all the latest electronic advances and is weather resistant. The scoreboard can be powered by the internal batteries or plugged into AC power continuously.

Features include:

- Simple operation
- Excellent visibility even in sunlight or under flood lights
- The last 20 scores are stored in the memory of the COMET terminal, so that a correction can easily be made.
- Tie breaks and open ended sets can be displayed
- Player names can be applied to the removable panels with magnetic letters or you can insert your own style of sign
- Two digit heights are available, 15 or 25 cm (6 or 9 inch)
- Dual power capability with batteries or AC
- All digits and electronics are accessible by sliding the front plexiglass panel open
- All ALGE products are fully warranted and tested prior to shipment.

Technical Data:


- The scoreboard and terminal are controlled by CMOS microprocessors and a quartz timing crystal operating at 4.608 MHz
- The COMET is powered by four AA batteries and features a separate watch type battery for memory storage
- The digits are bi-stable, 7-segment, electromagnetic modules, with highly visible yellow vanes. They are rated for over 60 million operations and have low power requirements.
- The case is plastic coated aluminum with hanging brackets on the back. The plexiglass front panel can be removed for easy repair and cleaning.
- Temperature range, -25 to 50° C (-20 to 120 F)
- Built in, replaceable NiCd power pack with charger for either 240 / 220 or 110 Volt AC power.

Additional options:



- Double sided scoreboards
- Time of day display
- Protected hinged covers
- Custom colors

Display-Configuration:

(Customer designed boards on request)

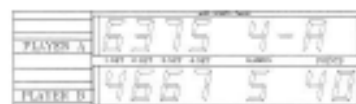

Dimensions:

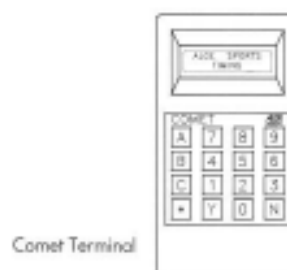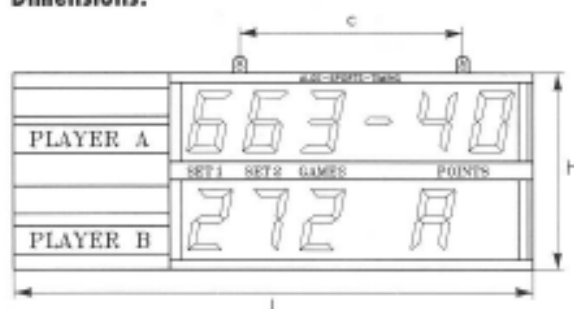

Comet Terminal

	character heights 15 cm			character heights 25 cm		
	Uni	3Sets	5Sets	Uni	3Sets	5Sets
L	1376	1376	1799	2113	2113	2803
H	590	590	590	796	796	796
depth	100	100	100	100	100	100
c	556	556	566	1093	1093	1093
all measurements in millimeter						

ALGE

TIMING

ALGE-TIMING GmbH & Co
 Rotkreuzstrasse 39
 A-6890 Lustenau
 Austria
 Tel: +43-5577-85966
 Fax: +43-5577-85969
 office@alge-timing.com
 www.alge-timing.com